

PATENT APPLICATION TRANSMITTAL LETTER

ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith for filing under 35 U.S.C. 111 and 37 CFR 1.53 is the patent application of
Robert M. Ames and Richard VanEseltine

entitled SYSTEM FOR GEOMETRICAL MODELING

Enclosed are:

☒ 14 pages of specification

☒ 2 pages of claims

☒ 8 sheets of drawing

☐ formal ☒ informal

☐ an assignment of the invention to _____

☒ executed Oath or Declaration of the inventors.

☐ a certified copy of a _____ application.

☐ associate power of attorney.

☒ information disclosure statement

☒ Form PTO-1449(PTO/SB/O8A and 08B)

☐ preliminary amendment

☐ other: _____

CLAIMS AS FILE

	Number Filed	Number Extra	Rate	Fee
BASIC FEE (37 CFR 1.16(a))			\$690	\$690.00
TOTAL CLAIMS (37 CFR 1.16(c))	7 - 20=	* 0	x \$18	
INDEPENDENT CLAIMS (37 CFR 1.16(b))	1 - 3 =	* 1	x \$ 78	
MULTIPLE DEPENDENT CLAIM PRESENT	37 CFR 1.16(d))		\$270	
*Number extra must be zero or larger	TOTAL			\$690.00
If applicant has small entity status under 37 CFR 1.9 and 1.27 then divide total fee by 2 and enter amount here			SMALL ENTITY	\$

☐ A check in the amount of \$ _____ to cover the filing fee is enclosed.

☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 50-0958 as described below. I have enclosed a duplicate copy of this sheet.

☒ Charge the amount of \$ 690.00 as filing fee.

☒ Credit any overpayment.

☒ Charge any additional filing fees required under 37 CFR 1.16 and 1.17.

☐ Charge the issue fee set in 37 CFR 1.18 at the mailing of the Notice of Allowance, pursuant to 37 CFR 1.31(b)

Date

9/11/2000

Jacob Shuster
 Jacob Shuster, Reg. No. 19,660

Office of Counsel Code 004

Naval Surface Warfare Center

Carderock Division Headquarters

David Taylor Model Basin

9500 MacArthur Boulevard

West Bethesda, MD 20817-5700

PTO
 09/659844
 09/11/00

SYSTEM FOR GEOMETRICAL MODELING

The present invention relates in general to computational modeling of geometric structures involving the disclosures submitted with prior copending application Serial No. 09/109,725 filed July 2, 1998, with respect to which the present application is a continuation-in-part.

BACKGROUND OF THE INVENTION

The representation of physical bodies using techniques associated with computational geometry or geometrical modeling, is already known in regard to design, visualization and manufacture of structural products or objects involving various limitations such as surface properties, shapes and part relationships. A lot of attention has been given to "Smart Product Models", "Simulation Based Design", "Integrated Design Environment", and "Integrated Product Data Environment". It has become evident that in "integrated environments" geometry plays a vital role as the common element in the design and analysis of complex systems. In essence, computational geometry is the closest data representation of the actual product of any piece of information. The form of geometric representation can determine the level of effort involved in generation of analysis data, the means to communicate the design for product review and mockup, and the ability to present the product for manufacturing. In essence, the "smart" product model more closely represents real products in function, form, performance, and physical characteristics.

In regard to the present invention, a technical publication entitled "Framework For Modeling Complex Structures" was published after the filing of the aforementioned copending parent application. Some of the content of such publication was extracted and transferred to the

1 specification and drawings of the present application. The remainder of such publication is
2 incorporated herein by reference, including terminology definitions.

3 SUMMARY OF THE INVENTION

4 In accordance with the present invention, geometric and polynomial elements are utilized
5 to represent physical structures, modeled as topological views of analytic functions, whose
6 bounding elements are related to connectors, defined in terms of mathematical algorithms to
7 bounding elements of other topological views, whereby geometrical modeling, discretization for
8 computational analysis, and multi-discipline integration of such structures may be performed by
9 computer aided design involving computational techniques. The topological view of a structural
10 model is formed with one outer element boundary together with one or more inner element
11 boundaries for which unique physical and/or solution properties or attributes may exist. Inner
12 boundaries which overlap or intersect with each other or with outer boundaries are excluded.
13 Types of topological views include, but are not limited to, bounded surface regions with
14 parametric edge element boundaries and bounded volume regions with bounded surface region
15 element boundaries. Spatial relationships between boundary object elements, called connectors,
16 are defined as algorithms of multi-dimensional functions or multidimensional mappings.
17 Connections and topological views combine to create robust and spatially connected logical and
18 functional structures along with their associative properties.

19 The present invention involves the role of related software developments in geometric
20 modeling, discretization for computational analysis, and multi-discipline integration. Such
21 developments provide a mathematical framework for geometry, grid data structures, analysis
22 characterization, and behavior modeling. A new geometry topology framework provides a
23 unique modeling capability to represent typical related geometry as well as provide more
24
25
26
27
28

complete functionality for discretization, evaluation, and modeling of complex boundary representations. Also provided is the capability to facilitate the work of an integrated product team. A unique role of the foregoing software developments is performed in the design and analysis of complex structures.

BRIEF DESCRIPTION OF DRAWING

A more complete appreciation of the invention and many of its attendant advantages will be readily appreciated as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawing wherein:

FIG. 1 is a composition functional diagram;

FIG. 2 is a surface and grid mapping diagram;

FIG. 3 is a surface and solution data mapping diagram;

FIG. 4 is a representation of multiple topology geometry;

FIG. 5 is a house arrangement diagram;

FIG. 6 is a GOBS Unified Modeling Language diagram of the Structure class;

FIG. 7 is a GOBS Unified Modeling Language diagram of the Spline class;

FIG. 8 is a GOBS Unified Modeling Language diagram of the Surfaceclass;

FIG. 9 is a GOBS Unified Modeling Language diagram of the Face class;

FIG. 10 is a GOBS Unified Modeling Language diagram of the Solid class;

FIG. 11 is a GOBS Unified Modeling Language diagram of the Topological View class;

FIG. 12 is a GOBS Unified Modeling Language diagram of the Property class

FIG. 13 illustrates boundary element candidates for construction of a topological view of surface type of physical structure from which data is extracted for geometrical modeling, and physical properties are associated in accordance with the present invention;

FIG. 14 illustrates a connector object of type CoEdge utilized for connecting topological views of type face;

FIGS. 15A and 15B are two dimensional domain views of parametric space illustrating the CoEdge relationship between different topological views shown in FIG. 14.

FIG. 16 illustrates a connector of type surface connecting overlapping topological views of type surface;

FIG. 17 illustrates two connected topological views of type volume where a topological view of type face bounds both.

FIG. 18 is a block diagram of robust geometry showing application of topology elements and connectors necessary for “smart” product modeling.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present invention involves product modeling through use of representational methods based on the assumption that all disciplines need product model data; that a common required representation exists; and that the product model contains sufficient information to convey design intent and detail for all disciplines. A fundamental premise associated with such methods is that product model data is composed of geometry, performance and modeling process, applicable to design and engineering analysis, and that such a product model can be composed.

Characterization of shape, behavior and content are fundamental to the product modeling process. Correct shape representation is dependant on the ability to define connectedness of the structure through computational methods and not through visual reference. Pursuant to the present invention, use of mathematical methods and the relationships therebetween provides a framework for “smart” product model development necessary for multi-discipline integration in a fully capable design environment. The foregoing referred to framework consists of: (1) a

1 Geometry and Engineering Mathematical Library (GEML) as a mathematical foundation for
2 modeling; (2) Geometry Object Structure (GOBS) utilizing such mathematical foundation to build
3 unique topologically connected models and allow for development of robust geometry necessary
4 for smart product modeling; and (3) Leading Edge Advanced prototyping For Ships (LEAPS)
5 which involves a combination of GOBS modeling with property and performance data. The
6 application of the aforesaid framework is the basis from which the environment for designing and
7 assessing complex systems is created.

9 In regard to (1) GEML, which provides a mathematical basis for modeling, the object of
10 such library is to: (a) develop, import, export, modify and evaluate spline based mathematics; (b)
11 develop, modify, adapt, grid or mesh data with associated spline functions; and (c) store resultant
12 geometry, grid, and analysis data in a common framework with dependencies maintained. Using
13 these objects, a GEML based framework contains and controls all information relating to
14 geometry, grids, and analysis. Since analysis is dependent on grids, and grids on geometry, the
15 coupling of these elements in an object oriented data structure is accommodated. GEML provides
16 for flexible representation and object dependency. It includes such features as geometry varying
17 with time; mapped geometry; grids defined in the geometry domain, and n-dimensional functions
18 for analysis characterization and behavior modeling.

20 In order to model geometry, grids, and analysis data it is necessary to have a mathematical
21 basis with facilitates representation of all three and allow for both implicit and explicit coupling
22 of the data. A fundamental element in GEML is the notion of n-dimensional spline functions,
23 combined with composition, select, and affine functions. N-dimensional splines in GEML allows
24 for the modeling and interpolation of any number of geometric and analysis variables; and by any
25 number of independent parameters such as time, frequency, or iteration. Such N-dimensional

splines are the building block for dynamic, variational geometry and representation of analysis data as a function. N-dimensional analysis functions are also ideally suited for use as performance behavior models. Consider a traditional spline surface and representation thereof extended by GEML to N-dimensions, as respectively depicted in the followings equations (1) and (2):

$$(x, y, z) = f(u, v)$$

Equation 1 - Traditional CAD Surface

vs. GEML

$$(x, y, z, Vx, Vy, Vz, Cp, temp, \dots) = g(u, v, time, \dots)$$

Equation 2 - GEML N-Dimensional Function

Of the GEML functions, the spline and composition functions provide the essential building blocks for geometry and analysis characterization and coupling. Additionally, the ability to map such functions to each other extends affords flexibility by removing parametric issues as a modeling constraint.

Consider an example wherein a surface is mapped to another surface. In this example, the mapping of one geometry to another is described by the composition of two functions. The first, parent geometry, is represented as a tensor product spline. The second, a mapped function, is also a tensor product spline entity, but its range is in the domain of the parent geometry. Composition functions are not limited by the dimensionality of the parent or base function. In the case of a typical CAD surface, $(x,y,z)=f(u,v)$, the parent representation would not allow for the inclusion of the notion of a surface changing with time. GEML, because of its non-dimensional nature, adds the ability to represent the parent geometry as a surface changing with time, i.e. $(x,y,z)=f(u,v,time)$. Thus, the domain of the parent geometry is an n -dimensional cube R . The domain of the mapped surface function is another n -dimensional cube D . In such case, the

mapped surface will not change in its location on the parent surface but its 3D image will change as the parent changes.

The foregoing reference to this geometry model is depicted in FIG. 1 where the mapping $f: R \rightarrow E^3$ is the parent geometry of the particular surface component and $g: D \rightarrow R$ is a surface mapping defining the relevant piece of the parent geometry. The notion of a composition of function arises from the mapping of one function with another such that the evaluation of that combined function behaves in a fashion similar to a chain rule.

The foregoing concept may be extended by forming a composition function which maps analysis data to geometry. Such mapping giving the ability to interrogate the relationship between performance and geometry because they are directly related and dependent.

A single n-dim function could contain; $(x, y, z, Vx, Vy, Vz, Cp, temp) = g(u, v, time)$
Now suppose we separate the geometry out and $(x, y, z) = f(u, v)$
create a second function containing the analysis data. $(u, v, Vx, Vy, Vz, Cp, temp) = g(s, t)$
By composing functions we perform the following;
 $f: (u, v) \rightarrow (x, y, z)$ and $g: (u, v, r1, r2, r3) \rightarrow (s, t)$
 $f \circ g(s, t) \rightarrow (x, y, z, r1, r2, r3)$

The notation $f \circ g(x)$ means "function f composed with function g ," and could be written as $f(g(x))$

The foregoing example demonstrates that n-dimensional splines and composition functions allow for the use of mapping from space to space. A surface can lie on another surface, a volume is contained within a volume, or a function can define the relationship between two discrete curves, surfaces, or volumes. A mapped surface may be gridded independent of the parent geometry to change with any parameter if necessary as shown in FIG. 2. By including the n-dimensional mapped functions, grid can be evaluated and the solution set returned and interpolated as a spline mapped to the geometry as in FIG. 3.

1 In regard to (2) GOBS, a new model for the construction, representation, and interrogation
2 of complex product models is provided. The GOBS model purports that product model data is
3 defined and represented as a 'view' of implicit and explicit geometric and analytic entities.
4 Views are compositions of entities whose relationships and attribute associations define the
5 entity. This is contrary to most representations where the geometry defines the view and the
6 object simultaneously. FIG. 4 depicts multiple geometry representations typical in product
7 modeling as performed using computer aided design (CAD). The geometry depicted illustrates
8 the many forms used in CAD systems today; which contain the same mathematical basis, but the
9 use of which topology of the model can vary widely. Each topology has benefits and constraints
10 in product modeling but none correctly represents real physical structure. For example, a typical
11 CAD b-rep solids representation treats the ship depicted in FIG 4 as a collection of solid blocks
12 each containing its own entities without knowledge of its relationship to the other entities. The
13 more common product model representation using trimmed surfaces generally provides the most
14 visually correct representation but loses all associations between surfaces. For example, there is
15 no knowledge about the relationship between hull and deck and that the two adjacent surfaces are
16 connected. The topology model based on GOBS provides the means to resolve such issues.
17 Geometric entities can be explicitly connected by their edges and discretization can occur across
18 faces while simultaneously resolving parameterization issues across boundaries. Using these
19 connections in combination with topological views, both solid and surface views can exist
20 simultaneously while adding knowledge of product structure relationships.

21 Another example of GOBS topology is illustrated in FIG. 5 with a universally understood
22 example. Here we have the common notion of a house arrangement formed by a kitchen, family
23 room, bedroom, and hallway. Semantics, features, and shape recognition typically resolve any

1 confusion about which region belongs with which space but geometrically and analytically they
2 are undefined. The product structure must be resolved visually. To ask the question, "What is
3 the area of the kitchen floor?", would generally suggest to the CAD operator that the kitchen floor
4 must be modeled with different geometry than that used to model the family room and hallway.
5 Thus, the area of the kitchen floor becomes the area of the surface. This assumption of geometry
6 and space falls apart when other relevant disciplines become involved. During construction of a
7 house, the plywood floor panels, carpeting, and drywall, are independent of these other spatial
8 designations. So to layout a grid of plywood panels on the floor surface would require a different
9 geometric representation. The issue becomes more complicated with more complicated models.
10 Ask the question, "What is the area of the roof of a car"? To resolve these issues, it is important
11 to realize that semantics can be universally understood but not explicitly defined. Thus, everyone
12 recognizes that the roof of a car is the somewhat flat region above the space where you sit, but
13 where the roof ends and the roof pillars begin is not defined. Current topology models do not
14 allow for the construction of a product model that can define the kitchen floor or the roof of a car
15 without unique, explicit, and redundant representation.

16
17
18 The GOBS structure allows for the extension of all representations into a common
19 topology using non-manifold models with support for manifold and non-manifold "views". Such
20 topology will also allow for future extensions, which will include additional n-dimensional
21 objects and composition functions. These extensions will allow more flexibility in deseritization
22 for physics based analysis, variational or time dependent analysis mappings, and allow more
23 complete representations of product structure in general. The GOBS model utilizes a unique
24 structure that allows geometry to be treated as a view of analytic functions, which satisfy the
25 constraints of typical geometric entities. An example is the representation of trimmed surfaces.
26
27
28

Currently CAD systems today consider a trimmed surface to be composed of a surface geometry bounded by a single outer boundary and any number of inner boundaries. This model does not allow the surface to be used as an entity to any other trimmed surface. It requires that a copy of that surface be made. GOBS, on the other hand, allows *topological views* of a trimmed surface where the view contains reference to one surface, one outer loop, and any number of inner loops. Thus, trimmed surface topological views of the kitchen floor, family room, hallway, etc. could be constructed using a single surface covering the entire floor and the boundaries depicting space, or any other subdivision of the floor surface. If these spaces do not satisfy the constraints of *topological views* they can be grouped as *common views*. Examples of additional spatial decompositions in *common views* could be “livable space”, “carpeted space”, “arrangeable space”, etc.

GOBS includes relational elements that allow for the connection of entities through geometric reference and related through algorithmic functions. The wall between the family room and the bedroom as depicted in FIG. 5 is attached to the floor. The wall may span multiple floors but it contains a geometric intersection with the floor. To better understand how these relational elements are composed, the following GOBS definitions of the class elements and their associations is presented.

Factory (GobsFactory)

Manages Gobs *Structures*

Structure (GobsStructure)

A *Structure* object creates and manages all Gobs objects that geometrically describe the design object. A *Structure* can be viewed as a collection of connected objects or entities that compose a part or structure.

Common View (GobsCommonView)

A *Common View* object groups *Topological View* objects and/or other *Common View* objects into a logical view of a *Structure* object. Objects may be members of multiple *Common Views*.

Topological View (GobsTopologicalView)

A *Topological View* object is a *Surface* object, a *Face* object, or a *Solid* object. *Topological Views* have *Characteristic* and *Property* objects.

Solid (GobsSolid)

A *Solid* object is a boundary-representation solid whose boundaries are *Oriented Closed Shell* objects.

Face (GobsFace)

A *Face* object is a part of a *Surface* object defined by *Edge Loop* objects.

Surface (GobsSurface)

A *Surface* object is a non-uniform rational b-spline representation of a surface.

Pcurve (GobsPcurve)

A *Pcurve* object is a parametric curve on a *Surface* object. Its range is the domain of the *Surface* it is mapped to.

Ppoint (GobsPpoint)

A *Ppoint* object is a point on a *Pcurve* object.

CoPoint (GobsCoPoint)

A *CoPoint* object is a collection of *Ppoint* objects that a the same point in model space.

Edge (GobsEdge)

A *Edge* object is a segment of a *Pcurve* object defined by two *Ppoints*.

CoEdge (GobsCoEdge)

A *CoEdge* object is collection of *Edge* objects that represent the same model space edge. A *CoEdge* contains a single n-dimensional function that contains the domain space of each member *Edge* as range variables of its function.

Edge Loop (GobsEdgeLoop)

A *Edge Loop* object contains a series of connected *Edge* objects that form a closed loop.

Oriented Closed Shell (GobsOrientedClosedShell)

A *Oriented Closed Shell* object is a collection of *Face* objects that form a closed shell.

Cartesian Point (GobsCartesianPoint)

A *Cartesian Point* is a point in Cartesian space.

Characteristic (GobsCharacteristic)

A *Characteristic* object contains *Property* objects and/or other *Characteristic* objects.

Property (GobsProperty)

A *Property* object contains an attribute's name and data.

1 The foregoing classes and their associations are diagrammed in FIGS. 6-12, using Unified
2 Modeling Language notation.

3
4 The present invention involves the use of connectors (i.e. GOBS CoEdges) and
5 topological views (i.e. GOBS TopologicalViews).

6 FIG. 13 illustrates by way of example a topological view of a two-dimensional base
7 surface 10 of which four parametric boundary elements exist. Several closed loop boundaries 12,
8 14, 16, and 18 are defined as composition functions on surface 10. A total of eight possible
9 topological views could be composed from these topology elements. Four trimmed surfaces with
10 no inner boundaries and outer boundaries 12, 14, 16, and 18 are possible. Four trimmed surfaces
11 with a single outer boundary 12 and their respective inner boundaries include (14 and 18), (14),
12 (16), and (18). Since each pair of inner loops (14 and 16) or (16 and 18) are intersecting as
13 shown in FIG. 13, such pairs of inner boundaries are not used for mapping pursuant to the present
14 invention, which excludes self intersecting boundaries as well as any boundary intersecting
15 another boundary.
16

17 Fundamental to the GOBS topology, the CoEdge provides a unique role in the connection
18 of boundaries necessary for robust topologies. A CoEdge's function is to know all edges located
19 on each surface and declares them to be equivalent in Cartesian space. It also contains an n-
20 dimensional spline function which maps the parameterization of each edge into a single function.
21 This allows for the continuity of points along one surface to migrate to another surface without
22 having to perform closest point approximations.
23

24 Pursuant to this invention, a connector object is illustrated in FIG. 14 showing two surface
25 objects 20 and 22 connected to each other along a single intersection 24 between the curved
26 surfaces of such objects, referred to as a CoEdge connector, which is expressed in terms of a
27
28

multi-dimensional function that maps both the physical intersection and the parametric domains of their respective edge boundaries.

Domain plots of the surfaces 20 and 22 and the underlying topology elements of the CoEdge connector are respectively diagrammed in FIGS. 15A and 15B with bounded parametric edge curves 26 and 28 respectively having parametric point boundaries 30, 32, and 34, 36. These parametric points, called GOBS Ppoints, are defined as a parametric location in the domain of curves 26 and 28. A connector object of type GOBS CoPoint maps 30 and 34 to a Cartesian location in space and another CoPoint similarly maps 32 and 36 to a location in Cartesian space. The CoPoint declares the two parametric Ppoints to be the same location in Cartesian space much the same as the CoEdge does to parametric edges on different surfaces.

Connector objects are not limited to edge boundaries of topological view representation of type surface or face as that illustrated by way of example in FIGS. 13, 14, 15A and 15B. In regard to the connector function associated with the topological view diagrammed in FIG. 16, the connector function (g) is: $(i,j) \rightarrow (u, v, s,t)$. Here a connector object of type surface 42 is connecting and mapping the space between two overlapping surfaces 38 and 40. Three-dimensional solids or volumes, 44 and 46, illustrated in FIG. 17 are likewise related by a connector of type surface 46. The connector objects in FIG 17 would have a functional relationship appearing, given the volume 44 defined as the spline function $(x1, y1, z1) = g(i, k, j)$ and the volume 46 defined as the spline function $(x2, y2, z2) = f(u, v, w)$, as $(i, j, k, u, v, w) = r(l, m)$. The construction of the connector would ensure that for a given (l, m) on function r a set of parametric locations (i, j, k, u, v, w) would be returned such that if evaluated against their respective functions g and f would return the same Cartesian location (x, y, z) .

Pursuant to the present invention, topological views of different geometrical structures respectively illustrated by way of example in FIGS. 14, 16 and 17, include connector objects providing logical and explicit connections for mapping domain to domain and domain to range between structural objects without being restricted by current geometric modeling methods to the dimensional function (R^3) denoting bounded regions of three dimensional Cartesian spaces. Based on the foregoing described topological view representations and the described mapping procedure associated therewith, a framework is established for different structures from a design environment for computational and geometrical modeling purposes.

FIG. 18 diagrammatically summarizes the procedure of the present invention as hereinbefore described, applicable to computer aided, geometric product modeling denoted by reference numeral 48. Such procedure involves product model representation; composed of connectors 58 and topological views 50. Such topological views are defined by outer boundary 52 and zero or more non-overlapping inner boundaries 54, whereby such boundaries are composed of individual boundary elements 56, so as to associate unique properties 62 within regions of the base geometry 60. The composition of product structure is made robust and associative through connectors 58 which mathematically relate boundary elements 56 across base geometry 60 domains.

Obviously, other modifications and variations of the present invention may be possible in light of the foregoing teachings. It is therefore to be understood that within the scope of the appended claims the invention may be practiced otherwise than as specifically described.

What is claimed is:

CLAIMS

1 ✓ In combination with geometrical modeling of physical bodies, a method for
2 evaluation and design of a structural product formed in accordance with said geometrical
3 modeling, including the steps of: establishing multiple topological views representing said
4 structural product through use of inner and outer boundaries; associating properties and
5 analysis with said topological views; and mapping said multiple topological views to a
6 common and unique base geometry.

1 2. The method as defined in claim 1 wherein said topological views overlap within a
2 parametric domain of said base geometry defining physical space of said structural product.

1 3. In combination with the method as defined in claim 1, a method for connecting
2 boundary elements of said topological views, where such boundary elements include points
3 on curves, edges on surfaces, faces on solids.

1 4. The method as defined in claim 3 wherein said step of connecting the boundary
2 elements is performed using connection objects mapping parametric domain space of two or
3 more of the boundary elements to common parameters, of which Cartesian is one, through
4 multidimensional spline functions.

1 5. The method as defined in claim 3 wherein said step of connecting the boundary
2 elements is performed using connection objects mapping two or more parametric points on
3 the respective boundary elements to a common Cartesian location in space.

1 6. The method as defined in claim 4 wherein said step of connecting the boundary
2 elements is performed using connection objects mapping parametric edge elements of a
3 topological view of type face to common parameters of which Cartesian location is one,
4 through multidimensional spline functions.

1 7. The method as defined in claim 4 wherein said step of connecting the boundary
2 elements is performed using connection objects mapping parametric surfaces elements of a
3 topological view of type volume to common parameters of which Cartesian location is one,
4 through multidimensional spline functions.

1 Navy Case No. 82,631

2
3 SYSTEM FOR GEOMETRICAL MODELING

4
5 ASBTRACT OF THE DISCLOSURE

6 Physical structures are represented by modeling as topological views having bounding
7 elements related to connectors as mathematical algorithms to enable computational analysis and
8 multi-discipline integration of such physical structures by computer aided design.
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

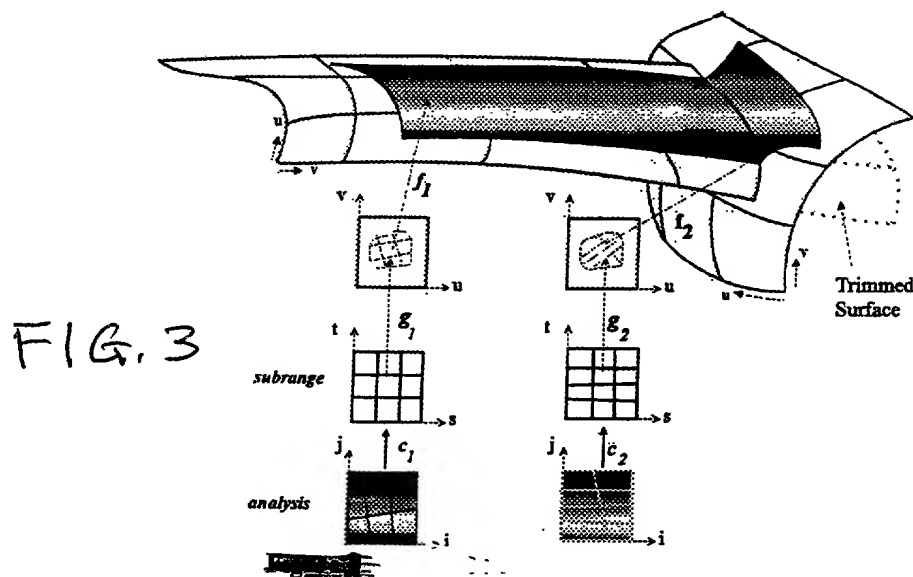
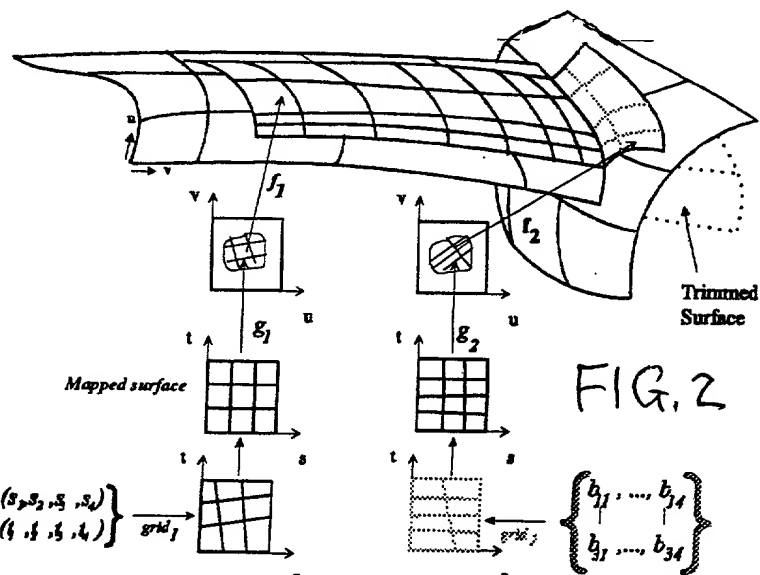
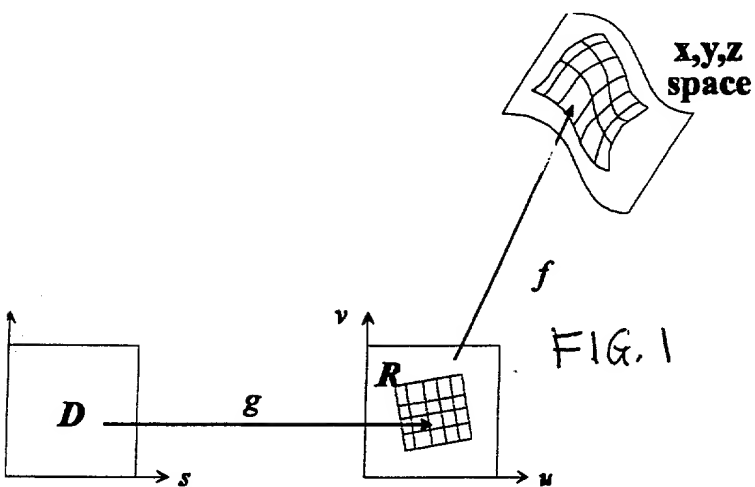


FIG. 5

FIG. 4

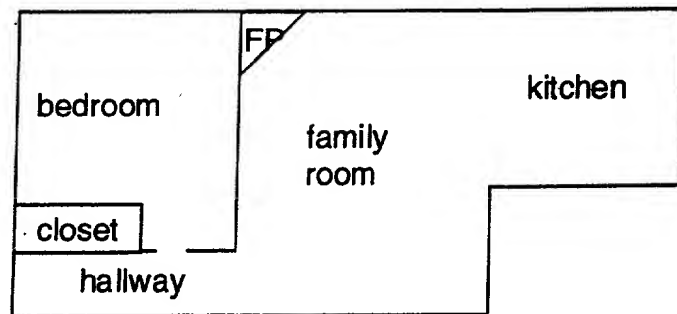
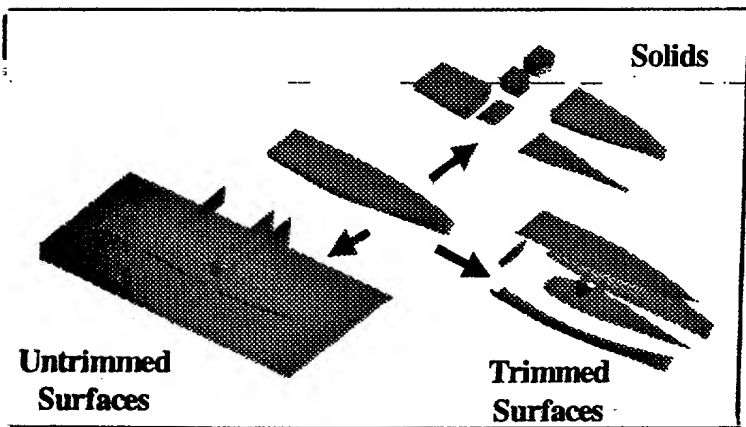


FIG. 6

001150-4465360

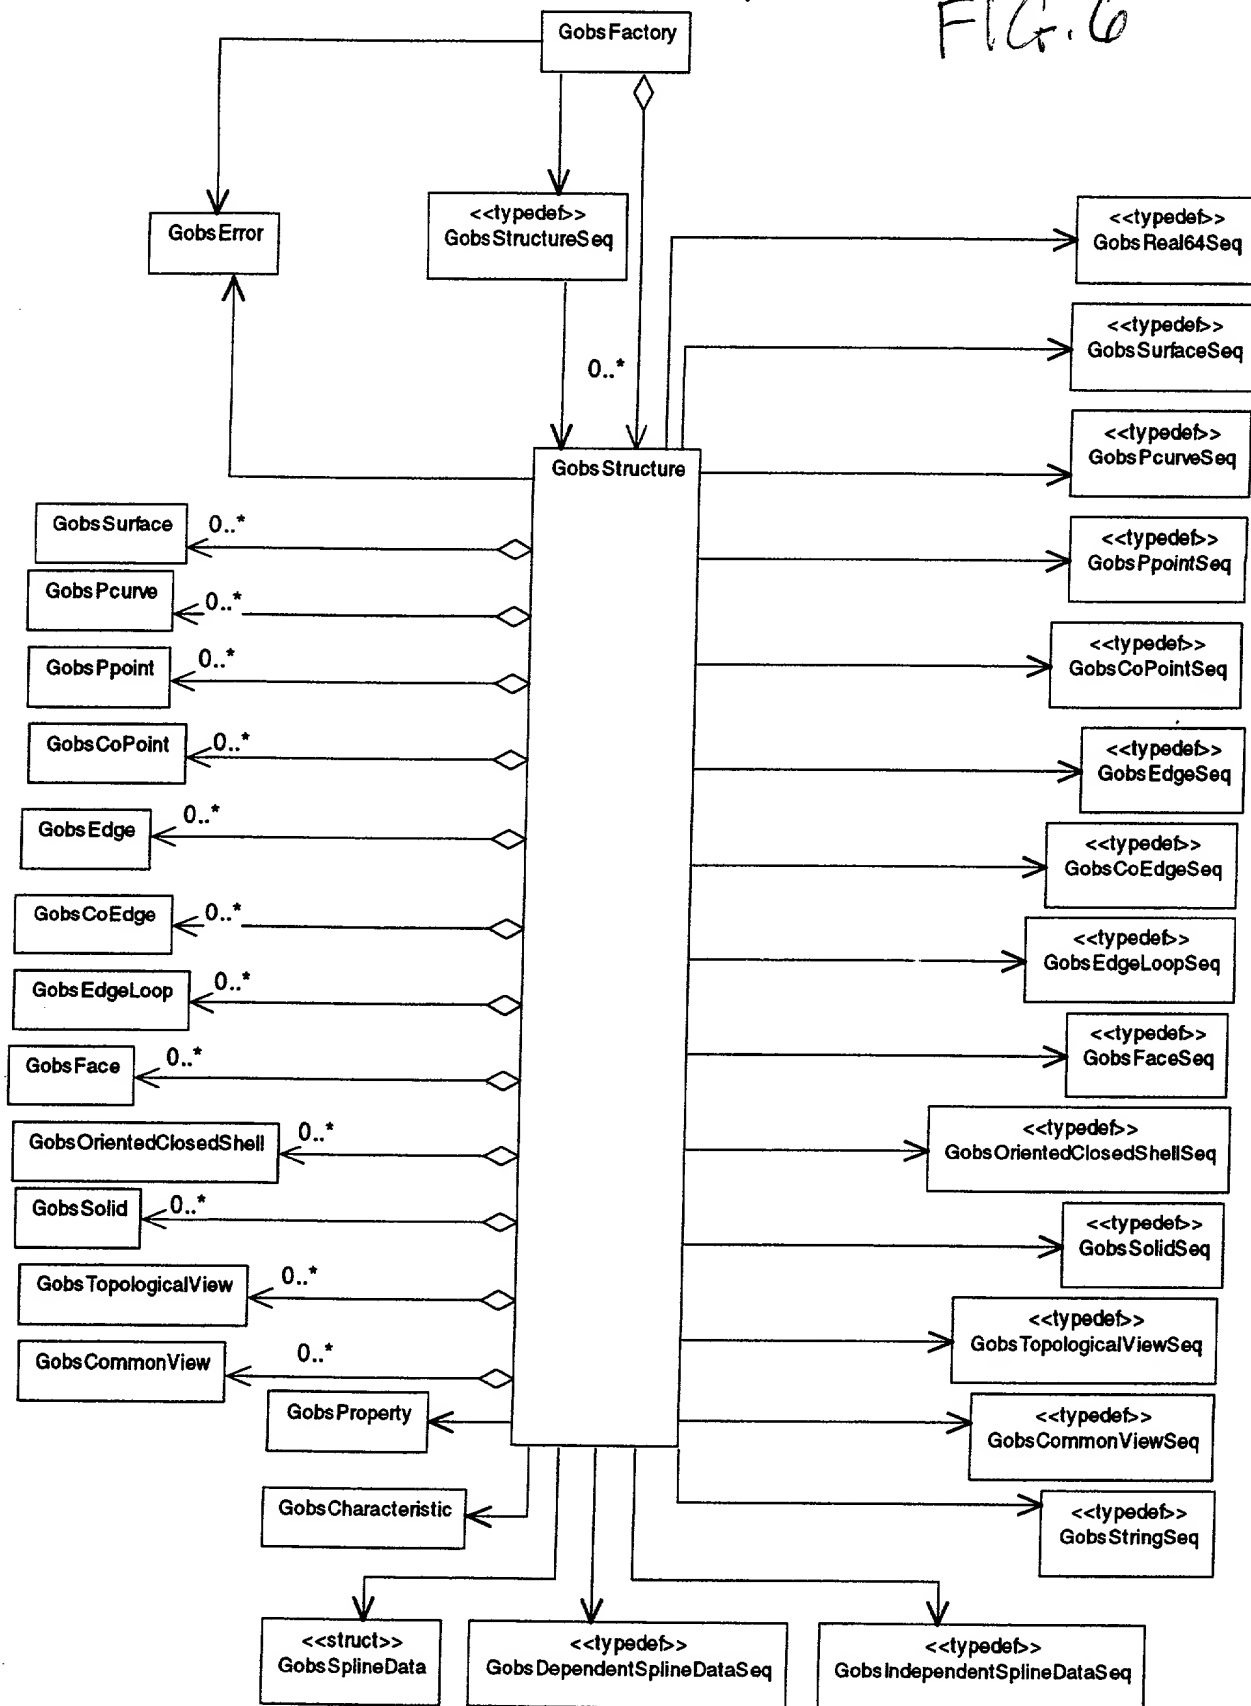


FIG. 7


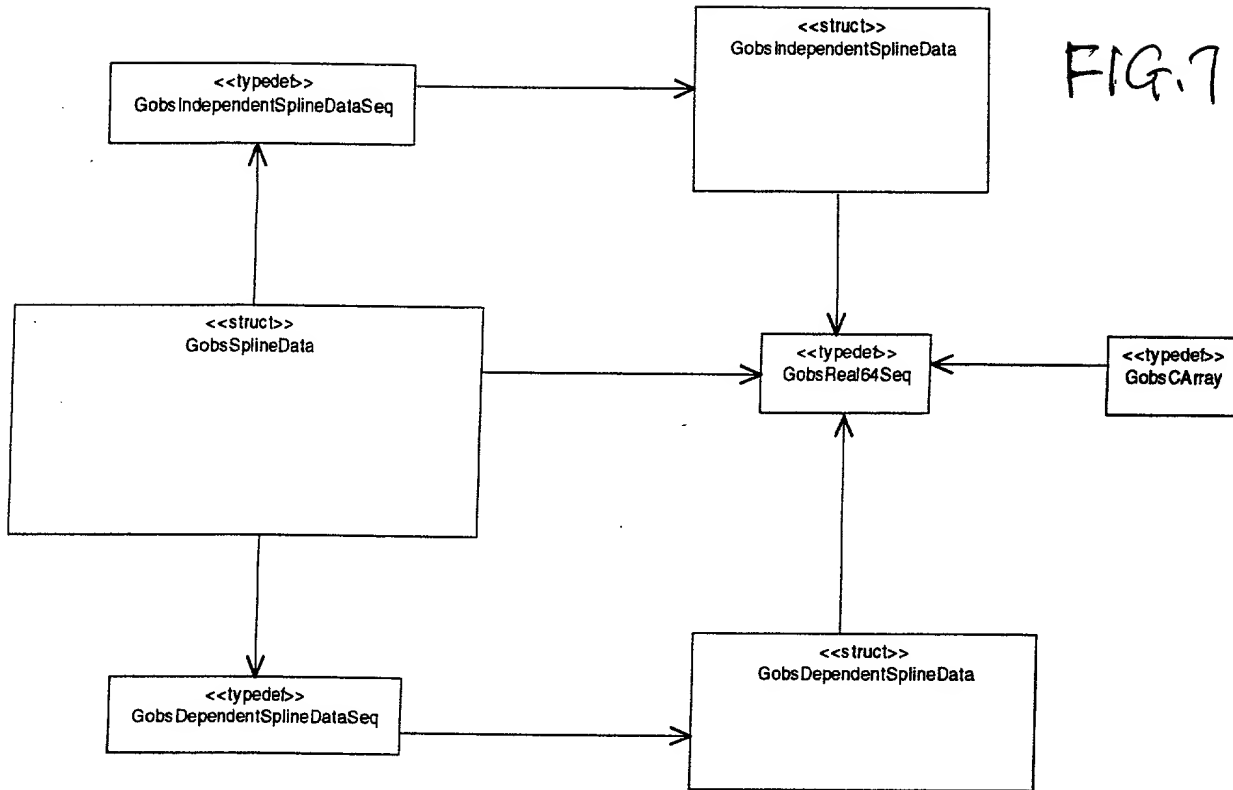


FIG. 8

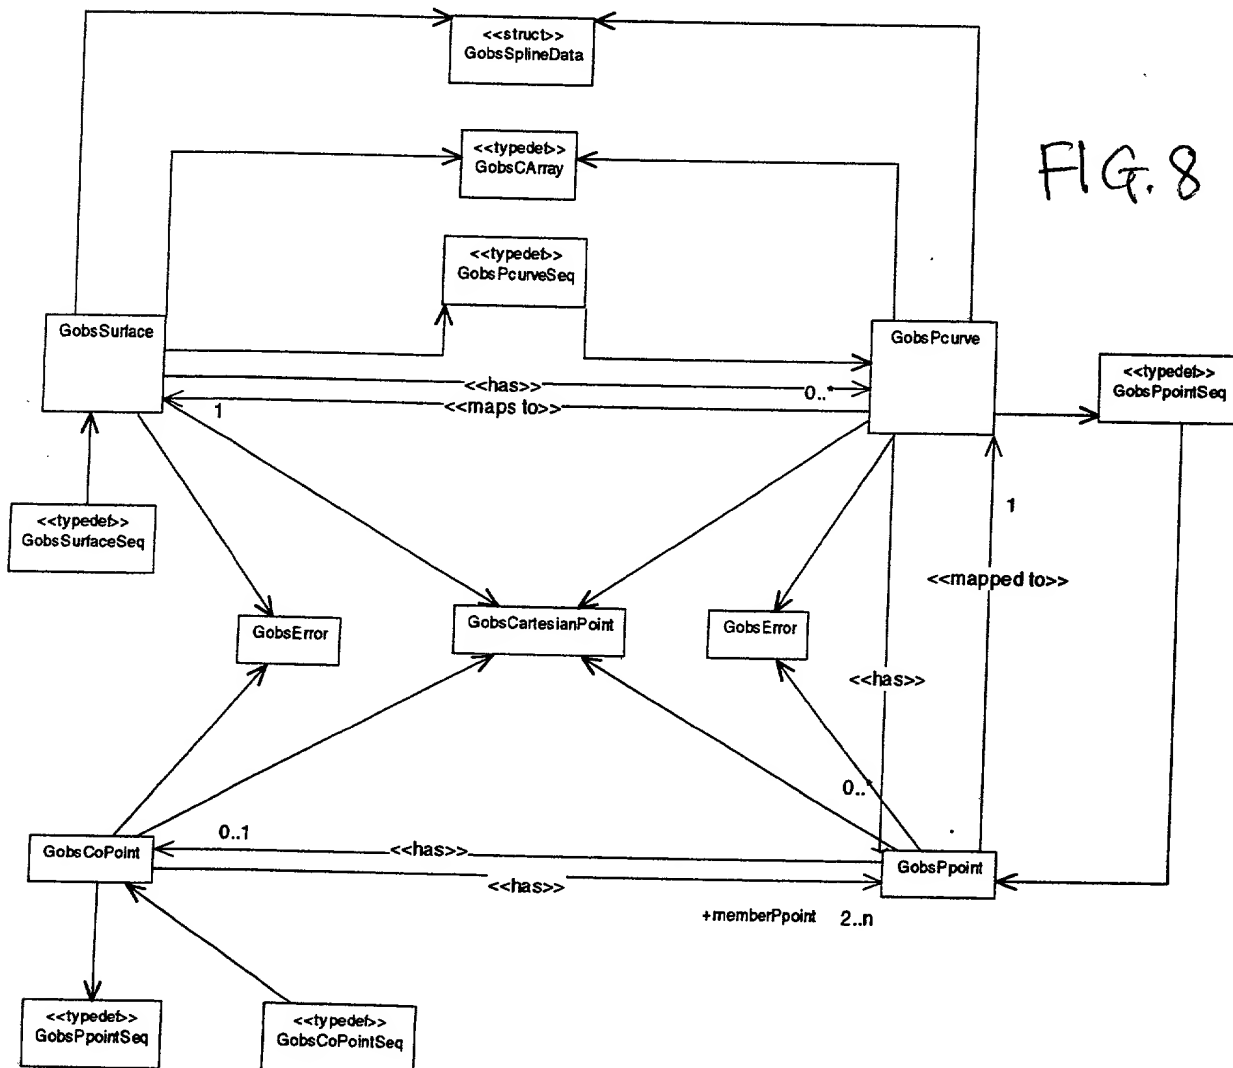

Variable	Mean	SD	Min	Max
Age	34.5	10.2	21	55
Gender	Male			
Marital status	Married			
Education	High school			
Occupation	Teacher			
Income	1500			
Health status	Good			
Smoking status	Non-smoker			
Alcohol consumption	None			
Exercise frequency	Weekly			
Stress level	Low			
Sleep quality	Good			
Dietary habits	Healthy			
Family size	3			
Work hours	40			
Commuting time	30			
Living space	100			
Neighborhood safety	High			
Access to green spaces	Yes			
Proximity to schools	Close			
Proximity to parks	Close			
Proximity to public transport	Close			
Proximity to shopping centers	Close			
Proximity to healthcare facilities	Close			
Proximity to recreational areas	Close			
Proximity to cultural institutions	Close			
Proximity to business districts	Close			
Proximity to residential areas	Close			
Proximity to commercial areas	Close			
Proximity to industrial areas	Close			
Proximity to government buildings	Close			
Proximity to religious institutions	Close			
Proximity to educational institutions	Close			
Proximity to entertainment venues	Close			
Proximity to public facilities	Close			
Proximity to social services	Close			
Proximity to community centers	Close			
Proximity to libraries	Close			
Proximity to museums	Close			
Proximity to theaters	Close			
Proximity to sports venues	Close			
Proximity to parks and gardens	Close			
Proximity to green spaces	Close			
Proximity to water bodies	Close			
Proximity to forests	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity to valleys	Close			
Proximity to plains	Close			
Proximity to mountains	Close			
Proximity to hills	Close			
Proximity				

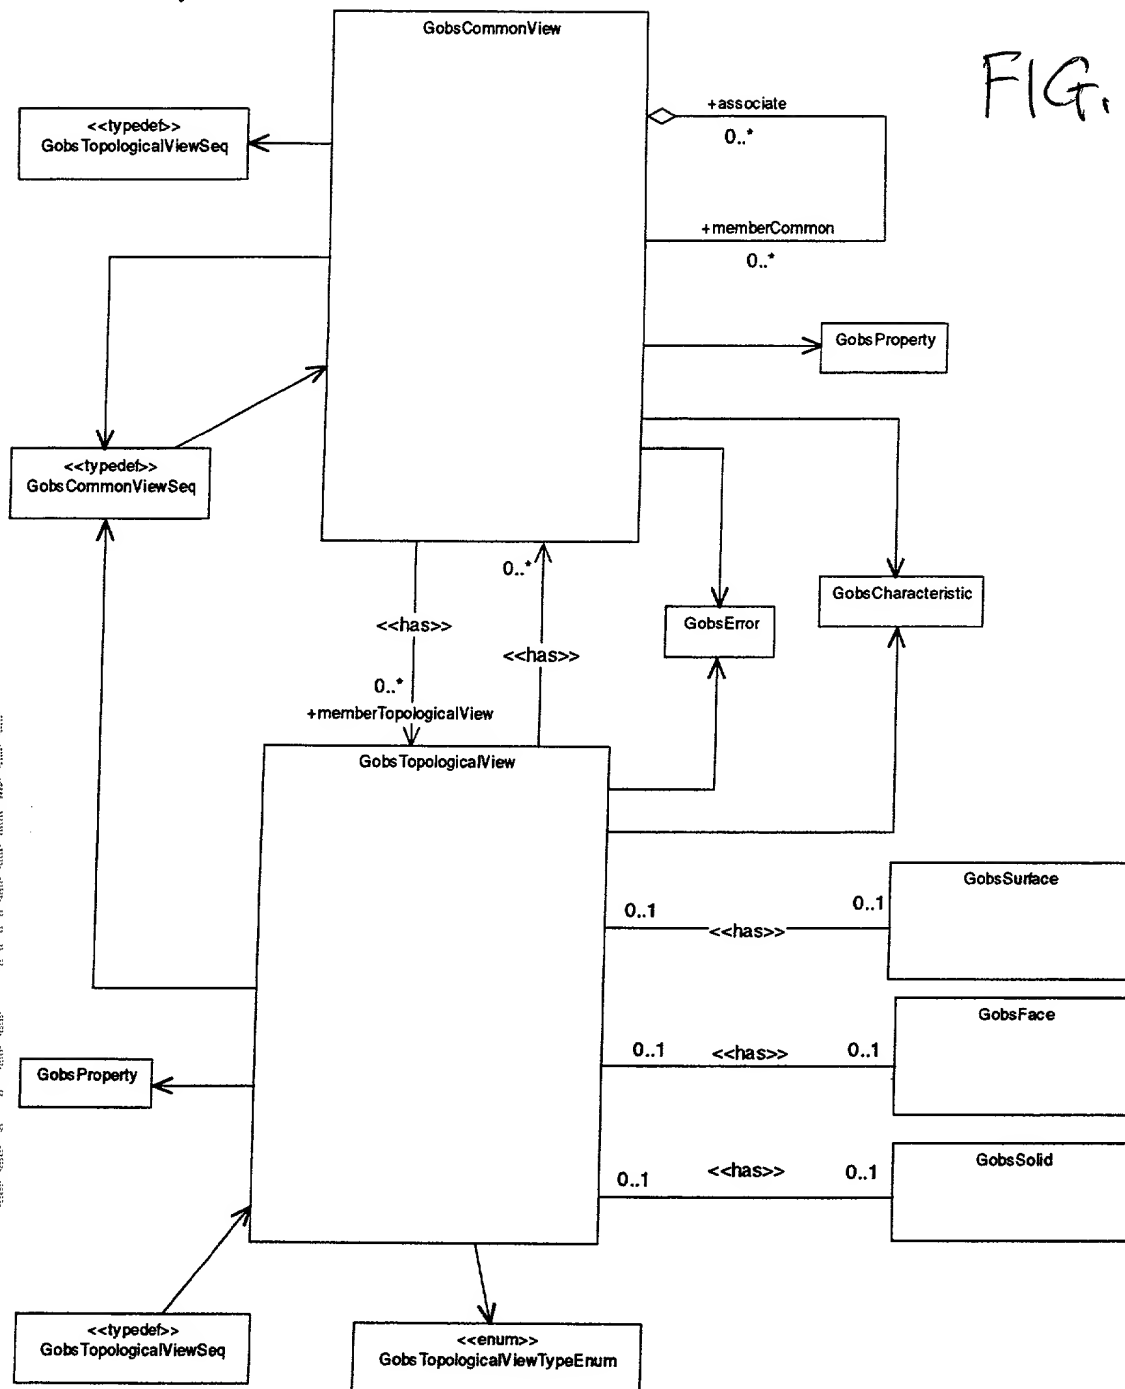
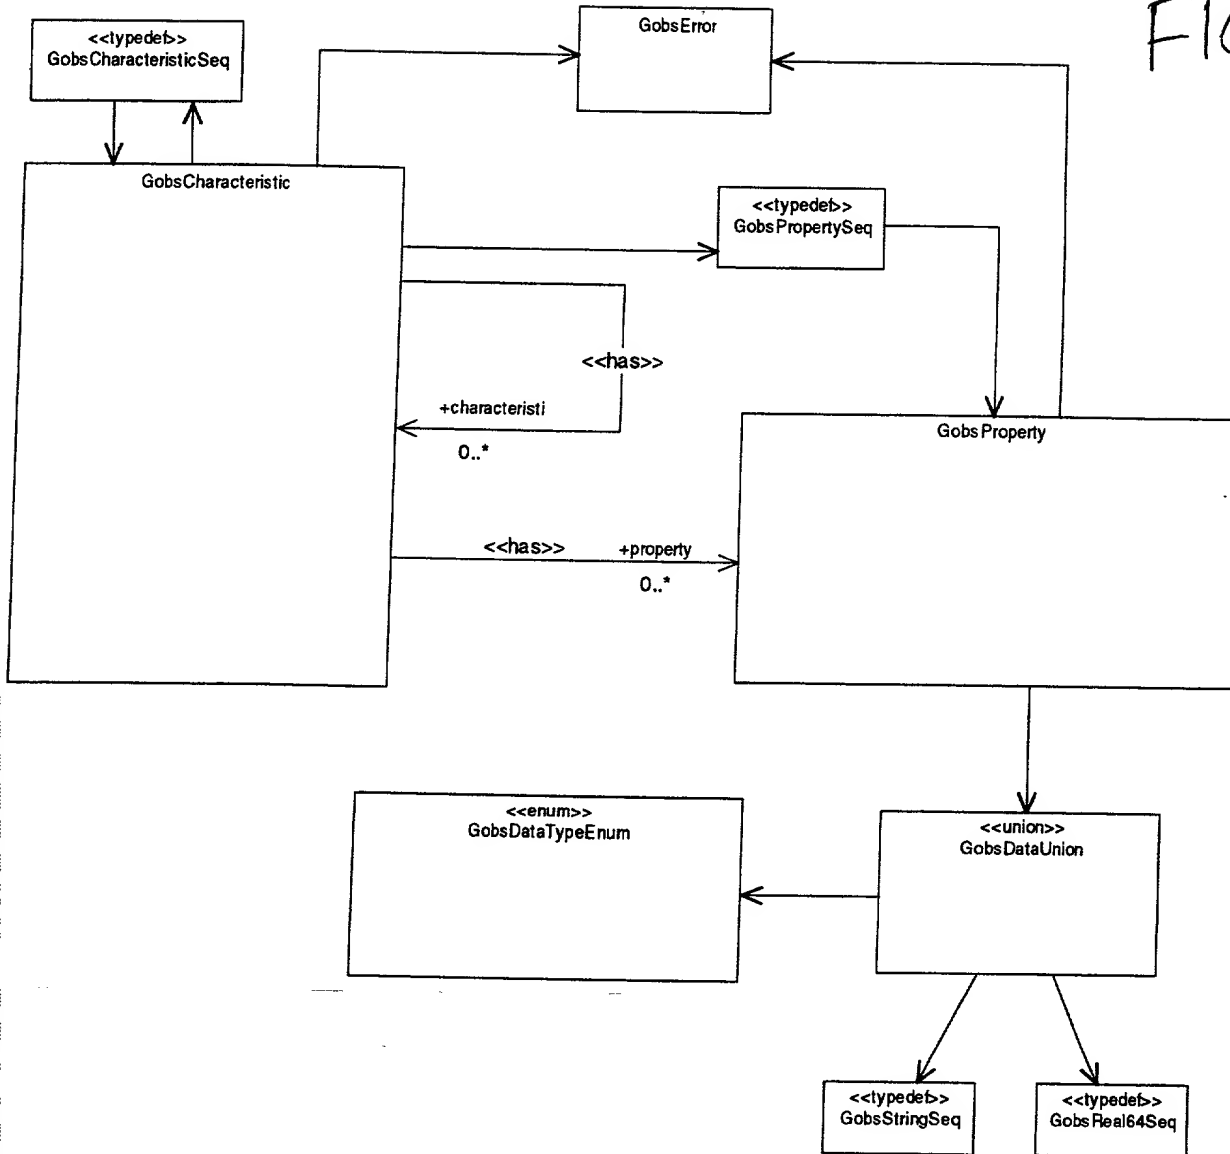


FIG. 12







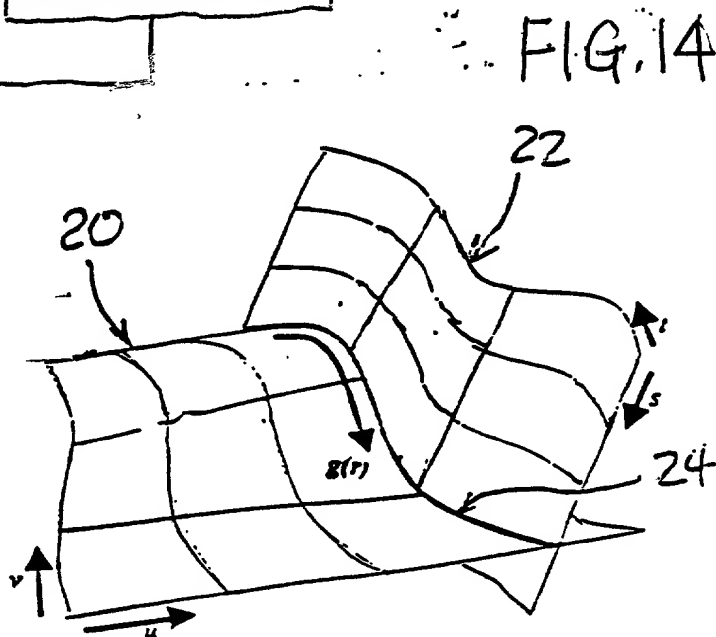


FIG. 15.B

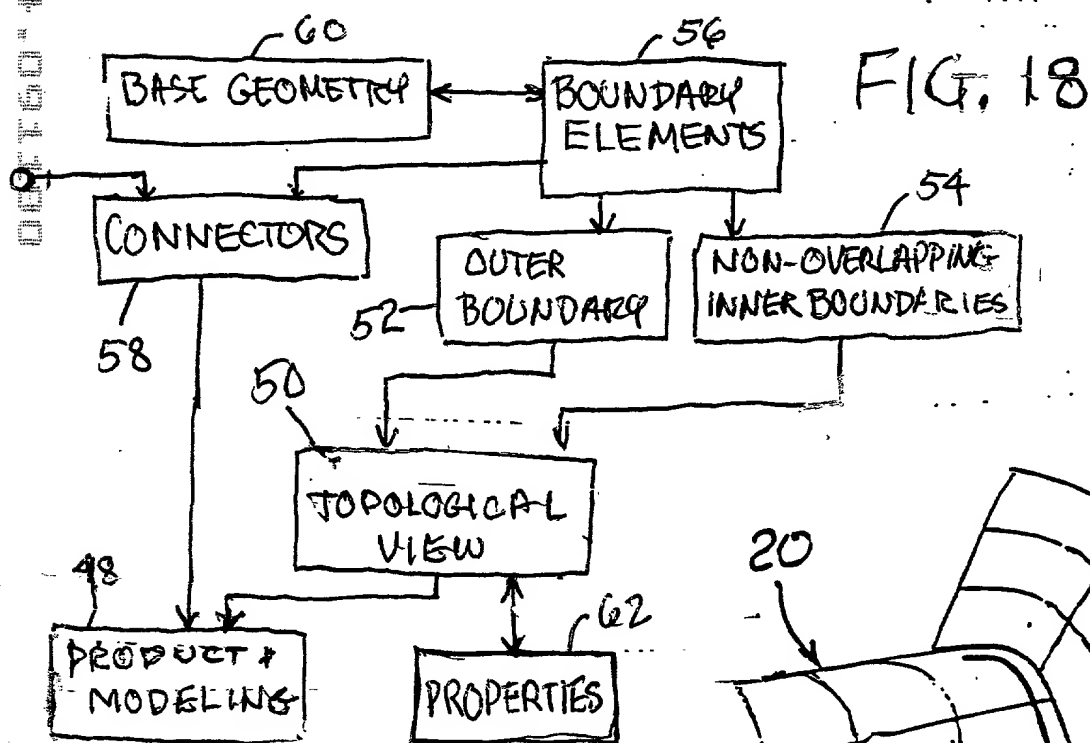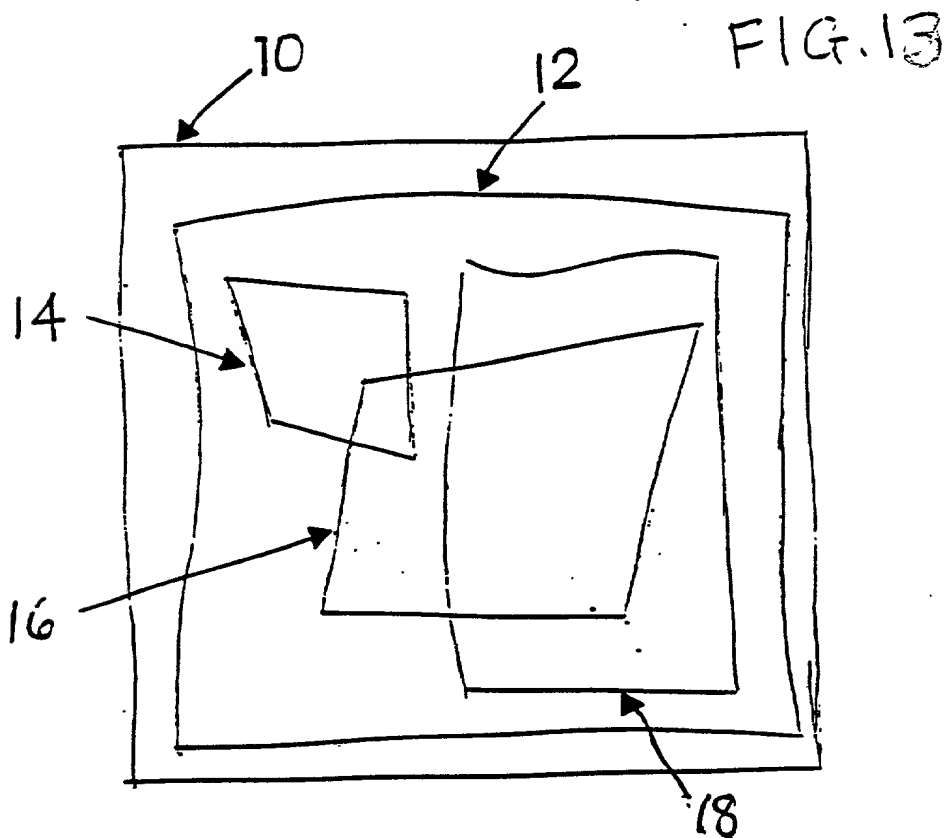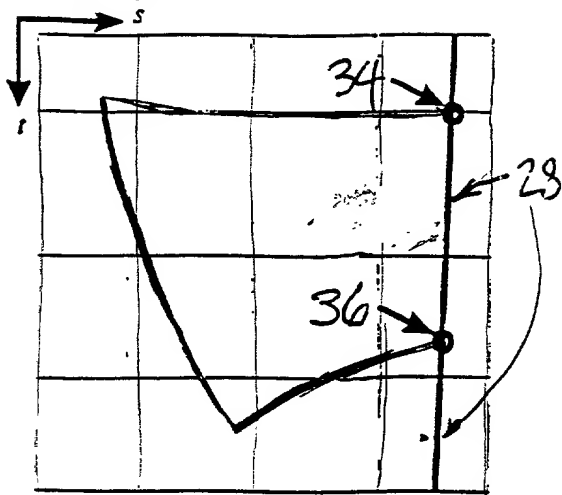


Surface 22

FIG. 15.A

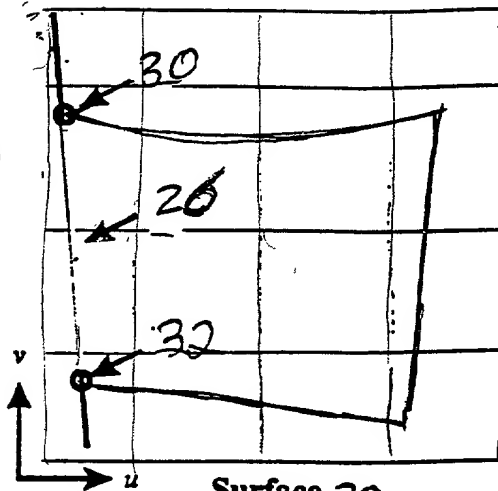


Surface 20

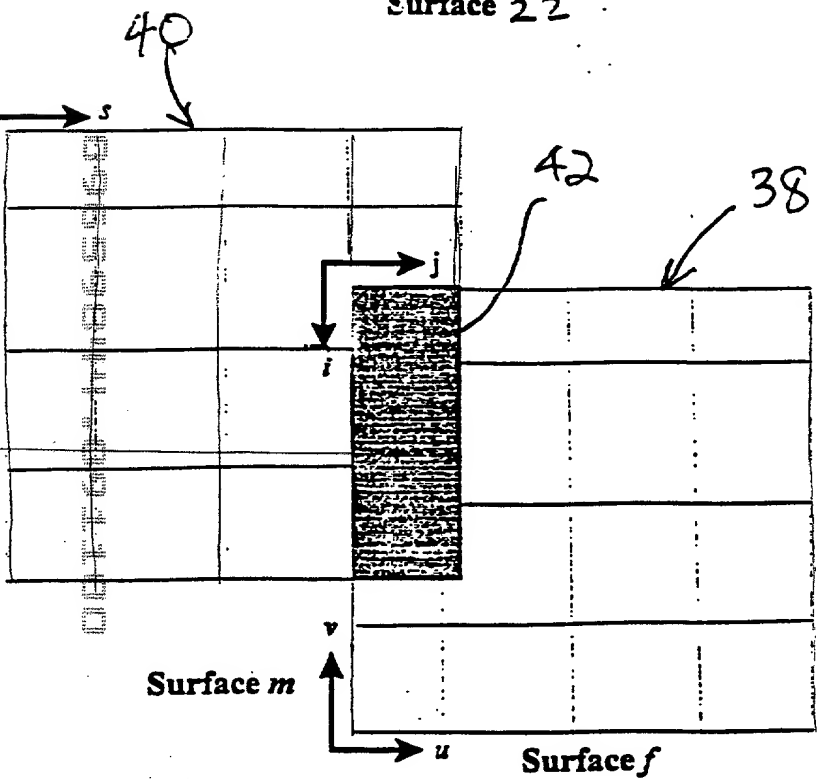

Surface m

Surface f

FIG. 16

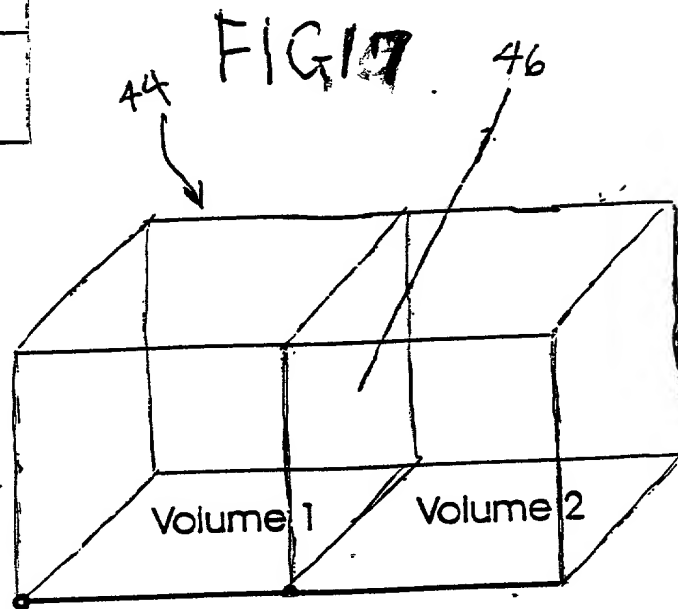

DECLARATION AND POWER OF ATTORNEY IN COPENDING APPLICATION CONTAINING ADDITIONAL SUBJECT MATTER

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

That I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural names are listed below) of the invention entitled: **SYSTEM FOR GEOMETRICAL MODELING**

which is described and claimed in the attached specification;

that this application in part discloses and claims subject matter disclosed in my earlier filed pending application Serial No. 09/109,725 , filed July 2, 1998 ;

that I have reviewed and understand the contents of the specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration;

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56;

that I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application including information which occurred between the filing dates of the aforesaid earlier application and this application; that as to the subject matter of this application which is common to said earlier application, I do not know and do not believe that the same was ever known or used in the United States of America before my or our invention thereof or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to said earlier application, or in public use or on sale in the United States of America more than one year prior to said earlier application;

that the common subject matter has not been patented or made the subject of an inventor's certificate issued before the date of said earlier application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to said earlier application; and

as to applications for patents or inventor's certificate on the common subject matter filed in any country foreign to the United States of America, prior to said earlier application by me or my legal representatives or assigns

☒ no such application have been filed, or

☐ such applications have been filed as follows:

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED WITHIN 12 MONTHS PRIOR TO SAID EARLIER APPLICATION

COUNTRY	APPLICATION NO.	DATE OF FILING (DAY, MO., YR)	DATE OF ISSUE (DAY, MO., YR)	PRIORITY CLAIMED UNDER 35 U.S.C. 119	
				YES	NO

ALL FOREIGN APPLICATIONS, IF ANY, FILED MORE THAN 12 MONTHS PRIOR TO SAID EARLIER APPLICATION

COUNTRY	APPLICATION NO.	DATE OF FILING (DAY, MO., YR)	DATE OF ISSUE (DAY, MO., YR)
---------	-----------------	----------------------------------	---------------------------------

that as to the subject matter of this application which is not common to said earlier application, I do not know and do not believe that the same was ever known or used in the United States of America before my or our invention thereof or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application; that said non-common subject matter has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application; and as to applications for patents or inventor's certificate on the invention filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns,

☒ no such application have been filed or

☐ such applications have been filed as follows:

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED WITHIN 12 MONTHS PRIOR TO SAID EARLIER APPLICATION

COUNTRY	APPLICATION NO.	DATE OF FILING (DAY, MO., YR)	DATE OF ISSUE (DAY, MO., YR)	PRIORITY CLAIMED UNDER 35 U.S.C. 119	
				YES	NO

ALL FOREIGN APPLICATIONS, IF ANY, FILED MORE THAN 12 MONTHS PRIOR TO SAID EARLIER APPLICATION

COUNTRY	APPLICATION NO.	DATE OF FILING (DAY, MO., YR)	DATE OF ISSUE (DAY, MO., YR)
---------	-----------------	----------------------------------	---------------------------------

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s).

I hereby claim the benefit, under Title 35, United States Code, §120, of any United States application(s) or 365(c) of any PCT international application designating the United States of America and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the filing date of this application.


POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number), and hereby certify that the Government of the United States has the irrevocable right to prosecute this application:

John L. Forrest, Jr., Reg. No. 29,378; Jacob Shuster, Reg. No. 19,660; Howard Kaiser, Reg. No. 31,381;


SEND CORRESPONDENCE TO: Office of Counsel Code 004 Direct Telephone Calls to:
Naval Surface Warfare Center
Carderock Division Headquarters Jacob Shuster
David Taylor Model Basin (301) 227-1835
9500 MacArthur Boulevard
West Bethesda, MD 20817-5700

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor ROBERT M. AMES

Inventor's signature  Date 9/11/2000
Residence 8854 Blue Sea Drive, Columbia, Maryland 21046
Citizenship U.S.A.
Post Office Address 8854 Blue Sea Drive, Columbia, Maryland 21046

Full name of second inventor RICHARD VAN ESELTINE

Inventor's signature  Date 9/11/2000
Residence 228 Sweet Pine Drive, Laurel, Maryland 20724
Citizenship U.S.A.
Post Office Address 228 Sweet Pine Drive, Laurel, Maryland 20724

Full name of third inventor _____

Inventor's signature _____ Date _____
Residence _____
Citizenship _____
Post Office Address _____